

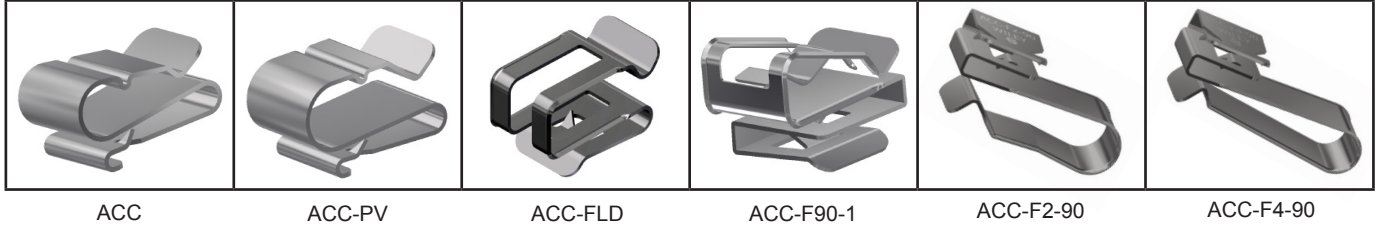


Wire Management Solutions

Engineered for high-quality wire management solutions, Wiley Cable Clips simplify wire management and create a cleaner aesthetic to solar PV arrays. The clips are made of corrosion resistant 304 stainless steel, which makes them a durable, long lasting and reliable solution for all environments, and are designed with coined edges to prevent damage to cable insulation. The design is easy to install and can be reused. The clips can be used in a wide variety of mounting configurations (including 90 degree) for module and rail applications and in conjunction with UNIRAP™ cable ties. Custom designs available upon request.

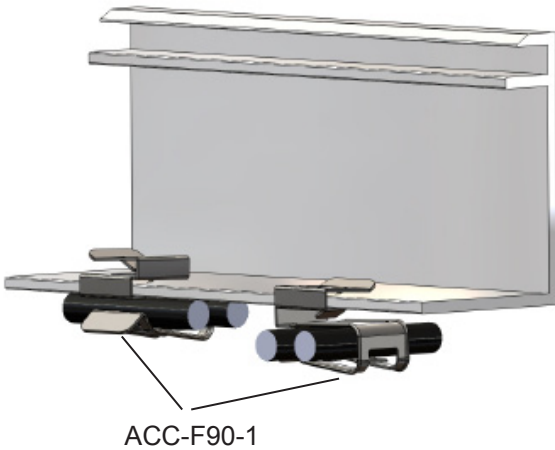

- Module Clips are UL1565 Listed as positioning device
- High quality wire management solutions
- Constructed of corrosion resistant 304 stainless steel
- Dual wire compartments
- Wide variety of mounting configurations
- Accommodates a broad range of cable combinations and sizes
- Special tab for easy installation & removal
- Coined edges to prevent damage to cable insulation
- Lasts for the lifetime of the solar system
- Custom designs are available upon request
- Multiuse

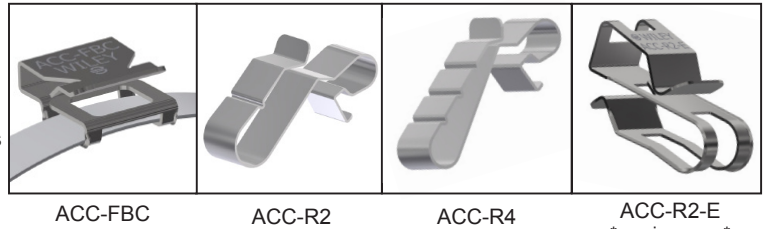

Catalog	Item #	Wire	Application
ACC	30020080	1-2 USE-2 wires or 1 PV wire Wire Diameter: Min 4.1mm / Max 6.7mm Module Thickness Range: 1.5-2.5mm	Module*
ACC-PV	30020081	1-2 PV wires Wire Diameter: Min 4.1mm / Max 7.49mm Module Thickness Range: 1.5-2.5mm	
ACC-FLD	50017421	1-2 USE-2 wires or 1-2 PV wire Wire Diameter: Min 4.1mm / Max 7.49mm Module Thickness Range: 1.5-2.5mm	
ACC-F90-1	50042497	1-2 USE-2 wires or 1-2 PV wire Wire Diameter: Min 4.1mm / Max 7.49mm Module Thickness Range: 1.5-2.5mm	Module* 90 degree
ACC-F2-90	50042501	1-2 micro inverter trunk cables or 1-2 AC cables Wire Diameter: 1 Wire - Min 4.1mm / Max 14mm or 2 wires - Min 4.1mm / Max 11mm Module Thickness Range: 1.5-2.5mm	
ACC-F4-90	50042503	1-4 wires PV wires Wire Diameter: Min 4.1mm / Max 7.49mm Module Thickness Range: 1.5-2.5mm	
ACC-FBC	50037643	For use with various UNIRAP™ cable tie sizes Max cable tie width: 8mm Module Thickness Range: 1.5-2.5mm	Module Bundle
ACC-R2	30020078	1-2 micro inverter trunk cables or 1-2 AC cables Wire Diameter: 1 Wire - Min 4.1mm / Max 14mm or 2 wires - Min 4.1mm / Max 11mm	Rail
ACC-R4	30020079	1-4 wires PV wires Wire Diameter: Min 4.1mm / Max 7.49mm	
ACC-R2-E *coming soon*	50037835	1-2 micro inverter trunk cables or 1-2 AC cables Wire Diameter: 1 Wire - Min 4.1mm / Max 14mm or 2 wires - Min 4.1mm / Max 11mm	

*UL 1565 Listed as positioning device

Customer Service 1-800-346-4175 | International 603-647-5299 | Canada 1-800-387-6487 | www.burndy.com